




A FULLRIVER BATTERY FOR EVERY APPLICATION

Since 1995, our goal has been to prove that AGM technology was not only superior to other battery types, but our batteries were also superior to other AGM manufacturers. Third party testers and customers' in-house engineering teams proved this to be true.

Now, our goal is to expand our products into a broadening list of applications. We fine-tuned our battery technology, added application specific batteries, included more battery types, and offer an extensive array of battery accessories and chargers for the complete solution. From solar to racing, AWP to marine, and everything in between, there is a Fullriver battery for every application.

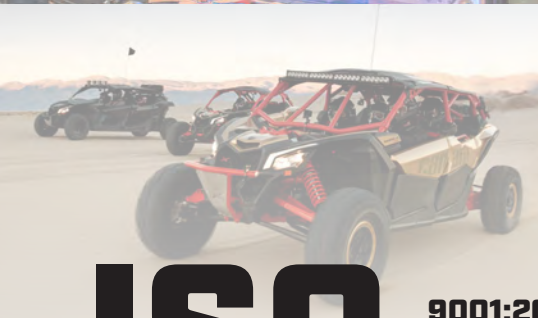

ISO
CERTIFIED

9001:2008 CERTIFIED / Quality Management System
14001:2004 CERTIFIED / Environmental Management System
18001:2007 CERTIFIED / Occupational Health & Safety Management System

DELIVERY APPROVED!
LAND, SEA, & AIR

Fullriver batteries are sealed lead acid batteries made with Absorbed Glass Mat (AGM) or GEL technology. The electrolyte is absorbed into the fiberglass (or gel) separator material rather than in a free-flowing liquid form. Fullriver batteries are non-spillable, electric storage batteries. Fullriver batteries are excepted from the requirements of DOT's hazardous materials regulations since Fullriver batteries adhere to the requirements of Code 49 CFR Section 173.159(D). **CLASSIFIED APPROVED: DOT, CFR, HMR49, IATA, ICAO67, IMDG27**

v01.2018




HIGH-PERFORMANCE
AGM BATTERY

FT
SERIES
Full Throttle
Series

SEALED & MAINTENANCE-FREE ENERGY SOLUTION



EXTREME POWER. ON DEMAND.

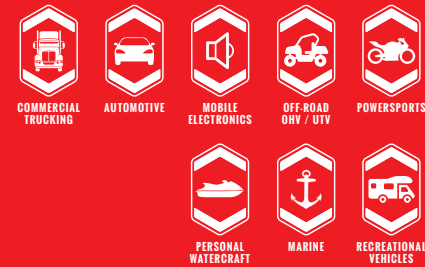

Full Throttle Series

HIGH-PERFORMANCE AGM BATTERIES

Full Throttle AGM batteries provide a combination of power, stability, and built-in resilience to keep you running in the most extreme conditions.



FT MODEL	GROUP SIZE	CCA	PHCA	HCA	CA	CAP. C20 [AH]	RES. CAP. @ 25A [min]	POSITIVE TERM. POSITION	TERM. TYPE	DIMENSIONS (in / mm)				WEIGHT (lbs / kg)
										LENGTH	WIDTH	HEIGHT	TTL HEIGHT	
FT100	BTX9-BS	100	310	200	155	8	8	LHP	M6	5.43 (138)	3.39 (86)	4.02 (102)	4.02 (102)	71 (3.2)
FT185	BS16L-B	185	545	300	240	14	15	RHP	M6	6.97 (177)	3.39 (86)	5.16 (131)	5.16 (131)	10.8 (4.9)
FT200	BTX20L-BS	200	535	300	265	14	20	RHP	M6M	6.69 (170)	3.90 (99)	6.18 (157)	6.18 (157)	13.2 (6.0)
FT200L	BTX20-BS	200	535	300	265	14	20	LHP	M6M	6.69 (170)	3.90 (99)	6.18 (157)	6.18 (157)	13.2 (6.0)
FT230	BT19BL-BS	230	680	410	310	20	28	RHP	M6	7.13 (181)	3.03 (77)	6.57 (167)	6.57 (167)	15.4 (7.0)
FT230-D	BT19BL-BS	180	500	290	240	22	22	RHP	M6	7.13 (181)	3.03 (77)	6.57 (167)	6.57 (167)	13.9 (6.3)
FT265	B16CL-B	265	625	440	350	18	26	RHP	M6	6.69 (170)	3.90 (99)	6.89 (175)	6.89 (175)	15.7 (7.1)
FT410	-	410	925	625	530	28	48	RHP	M6 + TP26	6.50 (165)	6.93 (176)	4.92 (125)	5.67 (144)**	23.2 (10.5)
FT410L	BTX30L	410	925	625	530	28	48	LHP	M6 + TP26	6.50 (165)	6.93 (176)	4.92 (125)	5.67 (144)**	23.2 (10.5)
FT438-U1	U1	438	975	605	525	35	50	LHP	M6 + TP26	7.72 (196)	5.16 (131)	6.57 (167)	7.56 (192)**	25.1 (11.4)
FT438-U1R	U1R/46A24L	438	975	605	525	35	50	RHP	M6 + TP26	7.72 (196)	5.16 (131)	6.57 (167)	7.57 (192)**	25.1 (11.4)
FT560	26R	560	1200	860	725	44	80	RHP	M6 + TP26	7.80 (198)	6.54 (166)	6.69 (170)	7.09 (180)**	33.3 (15.1)
FT560L	26	560	1200	860	725	44	80	LHP	M6 + TP26	7.80 (198)	6.54 (166)	6.69 (170)	7.09 (180)**	33.3 (15.1)
FT610-47	47/L2/H5	610	1280	890	745	50	105	RHP	AP	9.49 (241)	6.89 (175)	7.48 (190)	7.48 (190)	42.1 (19.1)
FT620-51	51	620	1300	890	745	55	100	LHP	M6 + TP28	9.02 (229)	5.43 (138)	8.19 (208)	9.06 (230)**	40.3 (18.3)
FT680-48	48/L3/H6	680	1320	975	810	60	120	RHP	AP	10.94 (278)	6.89 (175)	7.48 (190)	7.48 (190)	47.8 (21.7)
FT750-25	25	750	1400	1080	900	64	120	LHP	AP	9.45 (240)	6.85 (174)	7.95 (202)	8.66 (220)	48.1 (21.8)
FT750-35	35/34R	750	1400	1080	900	64	120	RHP	AP	9.45 (240)	6.85 (174)	7.95 (202)	8.66 (220)	48.1 (21.8)
FT825-24*	24	825	1500	1200	1000	65	135	LHP	M6 + TP28	10.28 (261)	6.77 (172)	8.19 (208)	8.90 (226)**	46.0 (20.9)
FT825-34	34	825	1500	1200	1000	65	135	LHP	M6 + TP28	10.28 (261)	6.77 (172)	7.19 (182)	8.19 (208)**	46.0 (20.9)
FT825-78	34/78	825	1500	1200	1000	65	135	LHP	M6 + FR45	10.28 (261)	6.77 (172)	7.19 (182)	8.31 (211)	46.0 (20.9)
FT850-94R	94R/L4/H7	850	1888	1200	1070	85	175	RHP	AP	12.36 (314)	6.85 (174)	7.47 (190)	7.47 (190)	55.7 (25.3)
FT890-49	49/L5/H8	890	1800	1300	1070	80	168	RHP	AP	13.90 (353)	6.89 (175)	7.24 (184)	7.48 (190)	60.4 (27.4)
FT930-65	65	930	1750	1350	1070	75	142	LHP	M6 + TP28	11.81 (300)	7.17 (182)	6.65 (169)	7.24 (184)**	54.9 (24.5)
FT965-27	27	965	1950	1380	1170	100	205	LHP	DT	12.09 (307)	6.65 (169)	8.43 (214)	9.33 (237)	69.5 (31.5)
FT965-27F	27F	965	1950	1380	1170	100	205	RHP	DT	12.09 (307)	6.65 (169)	8.43 (214)	79.33 (237)	69.5 (31.5)
FT1100-31	31A	1100	2200	1560	1360	110	230	RHP	M6 + TP28	12.99 (330)	6.81 (173)	8.31 (211)	9.33 (237)**	75.2 (34.1)
FT1100-31ST	31T	1100	2200	1560	1360	110	230	RHP	3/8" Stud	12.99 (330)	6.81 (173)	8.43 (214)	9.13 (232)	75.2 (34.1)
FT1150-6T	6TL	1150	2250	1700	1450	120	273	RHP	M6 + TP28	11.02 (280)	10.43 (265)	8.09 (206)	8.86 (225)**	85.8 (38.9)
FT1210	GC12	1210	2400	1750	1505	140	321	LHP	M6	12.87 (327)	7.17 (182)	10.59 (269)	10.75 (273)	98.1 (44.5)
FT1250-4DLT	4DLT/D5	1250	2200	1720	1500	175	340	LHP	M6 + TP28	20.20 (513)	8.78 (223)	7.75 (197)	8.74 (222)**	123.5 (56.0)
FT1450-8D	8D	1450	2400	1950	1700	225	450	RHP	M6 + TP28	20.35 (517)	10.79 (274)	8.58 (218)	9.57 (243)**	161.2 (73.1)
FT16V830-24	24 [16V]	660	1140	990	830	62	120	LHP	M6	10.24 (260)	6.61 (168)	8.39 (213)	8.54 (217)	59.3 (26.9)

* FT825-34 with 1" spacer

** Brass SAE post is removable reducing total height by 0.86" to 1.00"



Canada: 1-888-271-8888

United States: 1-844-370-0258

Panama: +507-292-4776

sales@magnacharge.com